# Applying the methodology: DP-complete problems on tissue-like membrane systems

**David Orellana-Martín**, Luis Valencia-Cabrera Miguel Á. Martínez-del-Amor, I. Pérez-Hurtado Agustín Riscos-Núñez, Mario J. Pérez-Jiménez


Research Group on Natural Computing
Dept. of Computer Science and Artificial Intelligence
Universidad de Sevilla, Seville, Spain

Seville, Spain, February 5, 2020






•  $i_{in} = r''_t$ 








- $i_{in} = r''_t$
- $cod(u_1, u_2) \rightsquigarrow cod_1(u'_1), cod_2(u'_2)$








- $i_{in} = r''_t$
- $cod(u_1, u_2) \rightsquigarrow cod_1(u'_1), cod_2(u'_2)$
- Time to reach  $h^{(i)}(t_i)$ ?








- $i_{in} = r''_t$
- $cod(u_1, u_2) \rightsquigarrow cod_1(u'_1), cod_2(u'_2)$
- Time to reach  $h^{(i)}(t_i)$ ?
- Synchronization between the answers?









































































































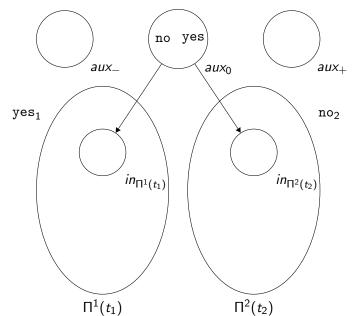





# Gràcies Merci 靈THANKYOU 黨 异 Gracias □



